



實利達有限公司

SRITA SENDIRIAN BERHAD

Reg. No. 49662-V



Quick Connect Couplings
Air Tools
Machine Tools



Electric Screwdrivers
Spring Balancers



Linear Air Compressors, Vacuum Pumps & Air Blowers



Tube, Fittings & Spiral Hoses



Tube & Fittings



Eightron Industrial Hoses



Pneumatic Components



Precision Die Grinders



Air Screwdrivers



Driver Bits



Air Nippers



Hand Tools



Air Hose Reels



Paint Spray Guns



Air Dusters



Impact Sockets



Hand Sockets



Spring Balancers



Air Hose Balancers



Grinding, Cutting & Sanding / Polishing Disc

SRITA





實利達有限公司
SRITA SENDIRIAN BERHAD



Head Office in Klang



Penang Office



Johor Office



Melaka Office

Srita Sendirian Berhad, established since 1979, is an importer / distributor specialized in fastening tools, machine tools, pneumatic tools & components, quick-connect couplings and fittings, hoses and tubings, industrial handtools, paint spray guns and other related products. Based in Klang with branch offices in Penang, Melaka and Johor Bahru, and over 800 dealers across the country, Srita is well positioned as a reliable and trusted supplier of quality industrial products in Malaysia.

Srita Sendirian Berhad has a total of 50 employees, the majority consisting of sales personnel. The sales function are divided into the Machine Tool Division, Tool Division, Pneumatic Division, Hardware Division and Coupling Division.

Srita is proud to be well-known for our strong after sales support provided by our fulltime staff in the Service Department. Service and repairs are performed locally using procedures and jigs recommended by manufacturer. In line with its primary function, Service Department gathers actual product performance data crucial for product development.

We are constantly developing new products to fully utilize our well-established sales network.

Division

Machine Tool Division

Machine Tools, Spares and Accessories.

Tool Division

Pneumatic and Electric Tools,
Consumables and Accessories: Driver Bits, Spring Balancers, Hose Reels.

Pneumatic Division

Pneumatic Equipment Components, Hoses, Tubings and Fittings, Air Compressors & Vacuum Pumps.

Hardware Division

Hi-Cupla, Handtools, Air Dusters, Paint Spray Guns, etc.

Coupling Division

Quick Connect Couplers for Various Fluid Lines.



Electric Screwdrivers

High Repeatable Torque Accuracy

Specifications:

Torque range	0.2 - 70 (kgf-cm) 0.02 - 7 (Nm)
Screw Size	machine screw (up to 8mm) tapping screw (up to 6mm)
Voltage Input	20VDC, 40VDC, 100VAC 115VAC, 230VAC
Starting Method	lever start & push to start

C Series (Current control Type)

Model DLV04C/10C

DLV04C10L

DLV010C10L

DCC0101X-AZ



Four screwdrivers can be consolidated into one

S Series (Variable speed Type)

Model DLV30S/45S/70S

DLV30S06P

DLV30S12P

DLV30S20

RC1000



DLV7300 Series



Transformerless Type DLV7104/8104/8204 Series



Screw Fastening Counter

DLR5040A-WE

Prevention of human fastening errors and enhanced fastening management accuracy



Brushless Type DLV30A/45A/70A Series (Transformerless Type)



Automation Series DLV30A/45A/70A Series



Accessories



LINK FUNCTION



Air Compressors, Vacuum Pumps, Blowers, Liquid Pumps

Medo pumps are unique products that feature a patented linear-motor-driven free piston system. Utilised in varied applications, from life support systems to robotics, Nitto Kohki has developed a comprehensive series of precision air compressors and vacuum pumps that incorporate this uniquely functional design. Proven throughout the world for over two decades, we are proud to have been selected by many leading companies in advanced industries as their primary supplier of air compressor type equipment.



Air Compressor

DAH & AC SERIES

AC/DC Voltage

Rated Pressure: 0.2~3.0 bar
Rated Airflow: 0.8~80 L/min

Applications:

- Medical Equipment
- Analyzers



Vacuum Pump

DVH & VP SERIES

AC/DC Voltage

Attainable Vacuum: -250 to -700 mmHg
Free Air Displacement: 3~60 L/min

Applications:

- Machine Screw Feeder
- Material Handling Machine



Air Blower

LA SERIES

AC Voltage

Rated Pressure: 0.11~0.2 bar
Rated Airflow: 28~200 L/min

Applications:

- Aerobic Sewage Treatment System
- Fish Pond Bubbling



Diaphragm Pump

VC & DP SERIES

AC Voltage

Attainable Vacuum: -76 to -500 mmHg
Free Air Displacement: 2.5~7.5 L/min
Rated Pressure: 0.04~2.5 bar
Rated Airflow: 6~25 L/min

Applications:

- Medical Cup Suction
- Massage devices



Piezoelectric Pump

BPH SERIES

AC Voltage

Discharge Pressure: 10~35 kPa
Flow Rate: 30~500 mL/min
Self-priming Pressure: 0.4~12 kPa

Applications:

- Suitable for pumping both liquids and gases.
- Liquids for medical injection and gases for pressure expansion



MACHINE

ELECTRIC &

ATRA ACE

Portable Magnetic Drilling Machine

Specification MODEL	Hole Capacity	Plate Thickness	Magnet Holding Power	Free Speed	Weight
LO-3550	Ø12-35mm	6-50mm	561kgf	950rpm	8.7kg
WOJ-3200	Ø12-32mm	9-50mm	918kgf	870rpm	13kg
AO-5575A	Ø12-55mm	9-75mm	1020kgf	520rpm	17.5kg
WA-3500	Ø12-35mm	9-50mm	720kgf	950rpm	20kg
WA-5000	Ø12-50mm	9-75mm	1000kgf	350/650rpm	23kg
QA-4000	Ø12-40mm	9-35mm	680kgf	750rpm	18.5kg
QA-6500	Ø12-65mm	9-50mm	1000kgf	400/750rpm	26kg
ARA-100A	Ø51-100mm	13-75mm	1733kgf	110~210/330~660rpm	30kg
AM-22	Ø12-22mm	12mm max	100-200mm (Vice Clamp)	750rpm	15kg

Portable "Cordless" Magnetic Drilling Machine

Specification MODEL	Hole Capacity	Plate Thickness	Magnet Holding Power	Free Speed	Weight
CLA-2720	Ø12-27mm	6-20mm	561kgf	430rpm	7kg

*Power Source : Single Phase AC 220V ~ 240V

ATRA ACE



WOJ-3200 (Manual)



AO-5575A (Manual)



WA-5000 (Semi-Automatic)



QA-series (Fully-Automatic)



LO-3550



CLA-2720



ARA-100A

JETBROACH One-Touch type



Tungsten Carbide Annular Cutters-(TCT)	
Cutting Capacity	Ø12 - 100 mm
Cutting Depth	25/35/50/75mm

HI-BROACH One-Touch type



High Speed Steel Annular Cutter-(HSS)	
Cutting Capacity	Ø12 - 32 mm
Cutting Depth	25 / 50 mm

*Resharpening Service is Available



AM-22



TOOLS

HYDRAULIC



JQA-EM4057



JQA-2042

SELFER ACE

HANDY SELFER

Portable Hydraulic & Electrical Punching "Selfer" Series

MODEL	Specification	Max Hole Capacity	Max Punching Thickness	Max Throat Depth	Punching Time	Weight
HS11-1624		Ø8-24mm	16mm	110mm	11.8sec	30kg
HS07-1624		Ø8-24mm	16mm	70mm	11.8sec	30kg
HS06-1322		Ø8-22mm	13mm	60mm	7.9sec	20.5kg
E55-0619		Ø6-19mm	6mm	55mm	2sec	14kg
E25-0615		Ø4-15mm	6mm	25mm	4sec	7kg

Power Source : Single Phase AC 220V ~ 240V


SELFER ACE



Double-Action Hydraulic Pump



Application

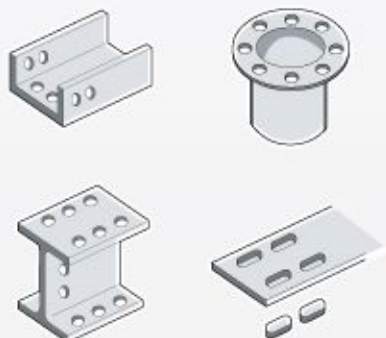

Round Punch



Round Die



Punches and Dies for Round Holes


Roll Pin



Oblong hole Punch

Setting Jig

Oblong hole Die



Punches and Dies for Oblong Holes

HANDY SELFER



E25-0615



E55-0619

HAND BEVELER

PORTABLE BEVELING TOOL

Chamfering Capacity 0-15C
Chamfering Angle 15-45°

HB-15B



ATRA MASTER

PORTABLE MAGNETIC DRILL STAND

M-320
Hole capacity Ø 32mm



HYDRAULIC MULTI WORKER

FOR ANGLE BAR UP TO 50MM

Multi Worker MW-20

Pump HPS-05



Applicable to stainless steel
angle bar process.
SUS304 Max. thickness 3mm



POWER

P N E U M A T I C &

SCALING

PNEUMATIC NEEDLE SCALER

JET CHISEL



JEX-28

MODEL	JC-16	JT-20	JEX-24	JEX-28
TYPE	Light-weight	Straight	Universal	Heavy duty
Stroke speed min ⁻¹	4000	4000	4000	4500
for needles Ø (mm)	2	2 & 3	2 & 3	2, 3 & 4

AIR HAMMER

AUTO CHISEL



MODEL	A-300
TYPE	Pistol
Stroke speed min ⁻¹	2600

PNEUMATIC SCALER

SUPER KELEN



MODEL	S-250	S-500	S-1000
Bar length	630 mm	890 mm	1,470 mm
Stroke speed min ⁻¹	2500	2500	2500
Chisel Shank Ø	12.7 mm	12.7 mm	12.7 mm

PNEUMATIC CHIPPING HAMMER

AIR CHIPPER



CH-24

MODEL	ACH-16	CH-24
TYPE	Straight	Straight
Stroke speed min ⁻¹	6000	4000

GRINDING

PNEUMATIC GRINDER

MYTON



MAGW-40

MODEL	MYG-25	MAGW-40	MYG-70
Disc size	58mm(2.5")	100mm(4")	180mm(7")
Rated speed	19000 rpm	13000 rpm	7600 rpm
Arbor hole	6 mm dia.	16 mm dia.	22 mm dia.

SANDING

PNEUMATIC GRINDER

MYTON



MYS-20

MODEL	MYS-20	MYS-40	MYS-70
Disc size	Max.50mm(2")	100mm(4")	180mm(7")
Rated speed	19000 rpm	13700 rpm	7600 rpm
Chuck	6 mm dia.	—	—
Arbor hole	—	16 mm dia.	22 mm dia.

GRINDING

PNEUMATIC DIE GRINDER

AIR SONIC



L-25B

MODEL	L-25B	L-35C	AL-55
Rated speed	27000 rpm	37500 rpm	56500 rpm
Type	Double-lock lever	Double-lock lever	Twist grip
Collet chuck	6 mm I.D.	6 mm I.D.	3 mm I.D.

SANDING

PNEUMATIC BELT SANDER

BELTON



B-10CL

MODEL	B-10CL	B-20CL	B-30CL
Type	Light-weight	Universal	Heavy Duty
Belt size (mm) W x L	10 x 330	20 x 520	30 x 540
Rated speed	17,000 rpm	18,000 rpm	15,000 rpm

SANDING

PNEUMATIC COMPACT SANDER

PALM ORBITAL SANDER



APS-125

MODEL	APS-125	APS-150
Pad size	125mm	150mm
Rated speed	10,000 rpm	10,000 rpm
Orbit dia	5mm	5mm

HANDY PNEUMATIC SANDER

FREE SANDER



FS-100C

MODEL	FS-50A	FS-100C
Pad size	75 x 82	100 x 110
Rated speed	15,000 rpm	20,000 rpm
Orbit dia	1.2mm	1.5mm

PNEUMATIC RECIPROCATING SANDER

LINE SANDER



MODEL	LS-10
Pad size	55 x 103
Rated speed min ⁻¹	4000
Stroke	4mm


HANDY PNEUMATIC SANDER

COMPACT MULTI SANDER



CMX-20

MODEL	CMX-20
Orbit dia	2mm
Rated speed	13000 rpm
Weight	0.53kg

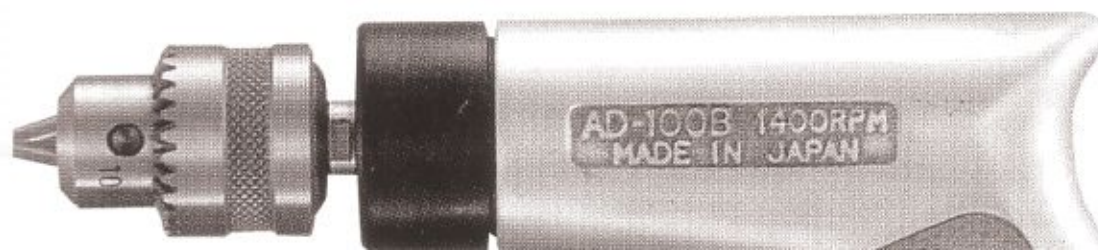



TOOLS

ELECTRIC



FINISHING

ELECTRIC MILL SCALE REMOVER

MILL SCALER



MODEL	EMS-110A
Power Consumption	1020 W
Rated Duty	4.6 A
Rated speed	3800 rpm

WELD BURN REMOVER

BRIGHTER for stainless steel



MODEL	EBT-100A
Power Consumption	1020 W
Brighter Wheel	Ø100 mm
Rated speed	3800 rpm

SANDING

ELECTRIC BELT SANDER

BELTON



MODEL	EB-20A	EB-30A
Power Consumption	510 W	1020 W
Belt size	20 x 520 mm	30 x 540 mm
Rated speed	11500 rpm	11000 rpm

DRILLING

PNEUMATIC HAND DRILL

AIR DRILL



MODEL	ADR-65	ADR-100
Drill capacity	6.5 mm (1/4")	10 mm (3/8")
Rated speed	2900 rpm	2000 rpm
Weight	0.8 kg	1.1 kg

CHAMFERING

PNEUMATIC CHAMFERING TOOL

MINI BEVELER



MODEL	AMB-0307
Chamfering capacity	Stainless Steel 0C ~ 3C or 2R, 3R, 4R Mild Steel 0C ~ 7C or 2R, 3R, 4R
Chamfer angle	15~45°
Rated speed	14000 rpm

RADIAL CHAMFERING TOOL

CIRCUIT BEVELER



MODEL	CB-02	CBR-03
Chamfering capacity	0C ~ 2C, 2R	3 R
Beveling angle	45°	45°
Rated speed	15000 rpm	12000 rpm

RADIAL CHAMFERING TOOL

CIRCUIT BEVELER (MINI)



MODEL	CB-01
Chamfering capacity	0C ~ 1C
Beveling angle	45°
Rated speed	28000 rpm

ELECTRIC CHAMFERING TOOL

MINI BEVELER



MODEL	MB-03A	EMB-0307C
Chamfering capacity	0C~3C, 2R, 3R	0C~7C, 2R, 3R, 4R
Beveling angle	45°	15 ~ 45°
Rated speed	7100 rpm	12,700 rpm

DEBURRING

PNEUMATIC DEBURRING TOOL

BURR CUTTER



MODEL	BC-005
Deburring Hole	3 to 34mm
Rated speed	420rpm
Shank	6, 8, 10 & 12mm

FILING

PORTABLE PRECISION FINISHING FILE

SUPER HAND



MODEL	SH-100A	ASH-900	SHL-40
Shank	6.3mm dia	5mm dia	3mm dia
Rated speed min ⁻¹	3700	6300	9000
Stroke	9mm	9mm	4mm

FINISHING

PORTABLE FINE FINISHING FILE

MICRO AIR HAND



MODEL	MAH-05	MAH-16
Shank	3mm	3mm
Rated speed min ⁻¹	22000	13000
Stroke	0.5mm	1.6mm

CUTTING

PNEUMATIC HACKSAW

SUPER SAW



MODEL	SSW-110
Capacity	Max. 3mm (Mild Steel)
Rated speed min ⁻¹	7000
Stroke	11mm



HI CUPLA®

• Working pressure
1.5 MPa

• Valve structure
One-way shut-off

• Applicable fluids
Air Water

PLUG



■ For hose connection

20PH	For 1/4" hose	400PH	For 1/2" hose
30PH	For 3/8" hose	600PH	For 3/4" hose
40PH	For 1/2" hose	800PH	For 1" hose

PH type



■ For female thread connection

10PM	For Rc1/8"	400PM	For Rc1/2"
20PM	For Rc1/4"	600PM	For Rc3/4"
30PM	For Rc3/8"	800PM	For Rc1"

PM type



■ For male thread connection

20PF	For R1/4"	400PF	For R1/2"
30PF	For R3/8"	600PF	For R3/4"
40PF	For R1/2"	800PF	For R1"

PF type



■ For male thread connection (parallel thread)

20PFF	For G1/4"		
-------	-----------	--	--

PFF type



- Available with steel, brass or stainless steel body.
- Steel applies to air only.



SOCKET

SH type



■ For hose connection

20SH	For 1/4" hose	400SH	For 1/2" hose
30SH	For 3/8" hose	600SH	For 3/4" hose
40SH	For 1/2" hose	800SH	For 1" hose

SM type



■ For female thread connection

10SM	For Rc1/8"	400SM	For Rc1/2"
20SM	For Rc1/4"	600SM	For Rc3/4"
30SM	For Rc3/8"	800SM	For Rc1"

SF type



■ For male thread connection

20SF	For R1/4"	400SF	For R1/2"
30SF	For R3/8"	600SF	For R3/4"
40SF	For R1/2"	800SF	For R1"

QUICK CONNECTIVE COUPLINGS FOR AIR EQUIPMENT

- * One-way shut-off cupla with an automatic shut-off valve in the socket
- * Important parts are hardened for excellent wear resistant and durability
- * Accuracy is obtained from connection/disconnection testing of 100,000 times

Important parts are hardened (steel).

Interchangeable with Hi Cupla 200, Hi Cupla Ace, Nut Cupla, Nut Cupla 200, Line Cupla, etc.

Automatic shut-off valve in socket.

Available with steel, brass or stainless steel body.

Available in various sizes and types of connections.

Refrigeration Automotive Air Conditioning Cupla Series (Custom Made)

Vacuum/coolant Type SP-V Type		• Product developed specially for vacuums and Freon refilling. • Has packing material that handles Freon substitutes.	For Expanded Pipes PCB Type		• Double-packing possible on the inner diameter portion and edge surface portion of the piping.
For Connection to Straight Aluminum-copper Piping PCV Type		• Detachable with no pipe forming. • Perfect for pressure testing, vacuums and Freon gas filling.	For Bulge Piping and Spool Piping PCBW Type		• Two-row ball lock system prevents pipe from falling over.
Screws onto Male thread NCF Type		• Easy, direct-screw-in to male screws. • Packing employs specially designed "stepped-lip packing."	For Straight Pipes PCBL Type		• Structure uses balls to lock outer diameter of pipe to improve detachability using the lever.
For gas charging CS Type		• Connects to SP-V type plug. • Detachable under pressure.	For Expansion of Straight Pipes with Rubber Valves PCW Type		• Structure allows some variations in pipe dimensions.
For Gas Charging (With purge function) CNR Type		• Connects to SP-V type plug. • Detachable under pressure. • Easy plug separation because residual pressure is purged by lifting lever.	For Special Pipes PCD Type		• Handles wide range of uses for special pipes.
For Gas Charging CNA Type		• Employs an air-less structure to hold down the mixing of air when connecting and fluid leaks when separating.	For Bead Pipes PCH Type		• Employs collet clamp system for improved pressure resistance.
For Automatic Plug Disconnection ACV Type		• Connects to SP-V type plug. • Air drive to separate plug.	For Pipe Inner Wall Lock PCIF Type		• Highly effective in narrow spaces because of the structure placing the clamp in the pipe inner wall.




CUPLA®

World's Leading Manufacturer
NITTO KOHKI's Quick-action Couplings



Model & Appearance	Recommended use
Air	
Hi Cupla 	General purpose Cupla for air lines.
Hi Cupla 200 	One-touch Cupla for air lines.
Nut Cupla 	For polyurethane tubing and spiral hose.
Rotary Nut Cupla 	Nut Cupla with swivel mechanism
Purge Hi Cupla 	Air line Cupla with purge mechanism.
Rotary Line Cupla RT type 	Rotating type simple branching air line Cupla.
Rotary Line Cupla RE type 	Rotating type simple branching air line Cupla.
Line Cupla 200T 	Simple branching air line Cupla.
Line Cupla 200L 	Simple branching air line Cupla.
Line Cupla 200S 	Simple branching air line Cupla.
Hi Cupla Ace 	Lightweight plastic Cupla for piping connections.
Twist Plug 	For pneumatic tools and devices.
Micro Cupla 	For piping of pneumatic control devices.
Micro Line Cupla 	Lightweight and compact for use on scientific equipment.
Small Cupla 	Lightweight and compact for use on scientific equipment.
Small Line Cupla 	Lightweight and compact for use on scientific equipment.
Super Cupla 	Light, compact for piping connections.

Model & Appearance	Recommended use
Oxygen / Fuel Gas	
Mini Cupla Super 	Heavy duty model for use on gas welders / cutters.
Gases and Liquids	
SP Cupla 	For medium pressure and general purpose.
TSP Cupla 	For medium pressure and general pressure.
Zerospill Cupla 	For medium pressure and general purpose.
Hydraulics	
HSP Cupla 	For hydraulic pressures up to 20.6 MPa (210 kgf/cm ²).
210 Cupla 	For hydraulic pressures up to 20.6 MPa (210 kgf/cm ²).
S210 Cupla 	Stainless steel for 20.6 MPa (210 kgf/cm ²) high pressure.
280 Cupla 	For 27.5 ~ 31.5 MPa (281 ~ 321 kgf/cm ²) hydraulic pressure.
350 Cupla 	For hydraulic pressures up to 34.5 MPa (352 kgf/cm ²).
450B Cupla 	For hydraulic pressures up to 44.1 MPa (450 kgf/cm ²).
700R Cupla 	For hydraulic pressures up to 68.6 MPa (700 kgf/cm ²).
Cooling water and heating oil (for mold)	
Mold Cupla 	General purpose type and mold coolant port coupling.
Flow Meter 	Specialized flow meter with valve for molds.
Dialysis Fluid	
Artificial Kidney Cupla (Plastic) 	For dialyzer piping.
Inert Gas / Vacuum	
SP-V Cupla 	For vacuum.
PCV Pipe Cupla 	For connection to copper pipe.
Charge Cupla CS Type 	For industrial gases.

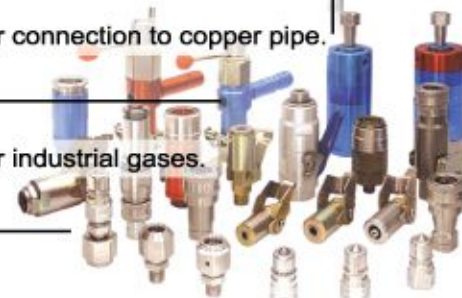


CHIYODA
**FINEST
TUBE &
FITTINGS**


Anti Spatter Tubing / Fitting



ALE - Double Protection
(Aluminium Film and Polyolefine)



LE - Single Protection
(Polyolefine - Flame Resistant Type)

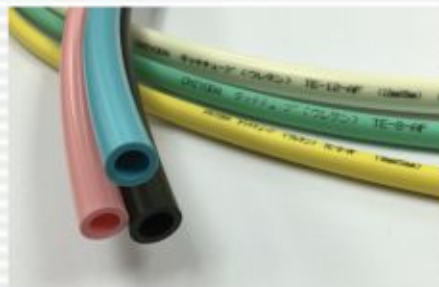

TE-AF
(Polyether base PUR Material)



CK Type Fitting



Fuji Type Fitting



Cover Peeler



**BG-50 Air Gun c/w
Pulse Blow Controller**

PBC-1000



TE Series




Spiral Yellow Hoses



Tube Cutter

HAKKO
CORPORATION

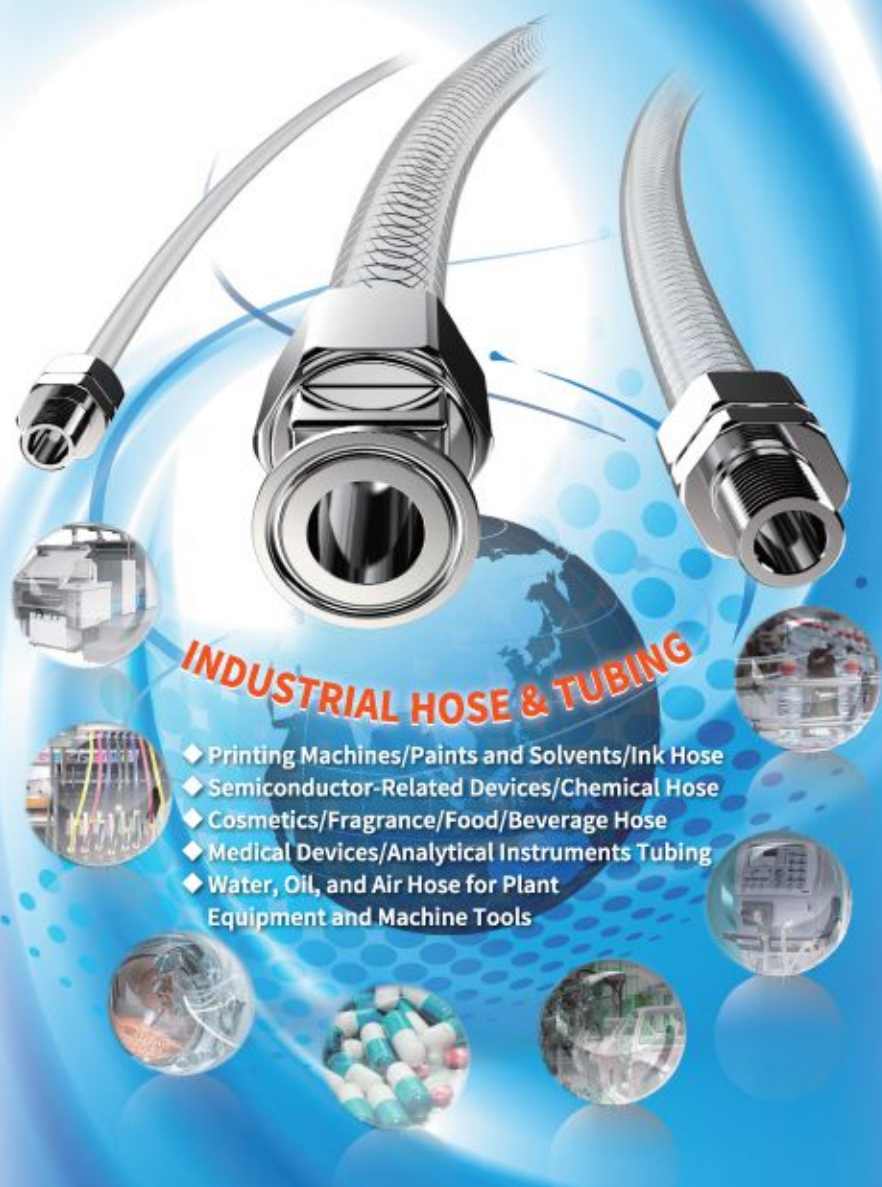EIGHTRON
HAKKO ORIGINAL


INDUSTRIAL HOSE & TUBING

- ◆ Printing Machines/Paints and Solvents/Ink Hose
- ◆ Semiconductor-Related Devices/Chemical Hose
- ◆ Cosmetics/Fragrance/Food/Beverage Hose
- ◆ Medical Devices/Analytical Instruments Tubing
- ◆ Water, Oil, and Air Hose for Plant Equipment and Machine Tools

Flexible Fluorine Resin Tubing/Hose Series



- E-SJ, E-SJ-CBU, E-SJ-BK** Flexible Fluorine (ETFE) Resin Tubing I.D.: 2 ~ 8 mm
- E-SJV** Flexible Fluorine (ETFE) Resin Tubing (PVC Type) I.D.: 6, 8 mm
- E-SJB** Flexible Fluorine (ETFE) Resin Yarn Reinforced Hose I.D.: 9 ~ 38 mm
- E-SJSP** Flexible Fluorine (ETFE) Resin SUS Spring Wire Hose I.D.: 12 ~ 38 mm
- E-SJD** Flexible Fluorine (ETFE) Resin Tubing (Dissipative Type) I.D.: 6, 8 mm
- E-SJSD** Flexible Fluorine (ETFE) Resin SUS Spring Wire Hose (Dissipative Type) I.D.: 12 ~ 25 mm
- E-PD** Flexible Fluorine (PVDF) Resin Tubing Clear I.D.: 2 ~ 8 mm
- E-PDB** Flexible Fluorine (PVDF) Resin Yarn Reinforced Hose I.D.: 9 ~ 50 mm

Industrial Hose Series



- E-TB** Pressure Hose I.D.: 4 ~ 75 mm
- E-STB** Oil-Proof Pressure Hose I.D.: 6 ~ 50 mm
- E-SP** Spring Hose I.D.: 8 ~ 50 mm
- E-KYS** KY Sunfoods Hose I.D.: 6 ~ 50 mm

Food Grade Hose Series



- E-KYT** KY Tube I.D.: 2 ~ 8 mm
- E-KYC** KY Coil Hose I.D.: 12 ~ 19 mm
- E-KYS** KY Sunfoods Hose I.D.: 6 ~ 50 mm
- E-OHB** KY Soft Braid Hose I.D.: 25, 38, 50 mm
- E-SF** Sunfoods Hose I.D.: 6 ~ 50 mm

Air Hose Series





- E-NF** New Flex Air Hose I.D.: 6.5, 8.5, 11 mm
- E-SNF** Soft New Flex Air Hose I.D.: 6.5, 8.5 mm
- E-AFC** Air Flex-conductive Hose I.D.: 6.5, 8.9 mm
- E-TCS** Teto Color S Hose I.D.: 6.5, 8, 9.5 mm

Solvent Transfer and Paint Hose Series



- E-SV** Solvent Transfer Hose I.D.: 6.5, 7.5, 9.5 mm
- E-PFF** Paint Flex-Fluorine Hose I.D.: 6.5 mm
- E-PFN** Paint Flex-Nylon Hose I.D.: 6.5, 8.9 mm



Made in Korea

New "G" Series
up to 20kgf/cm² (20Bar)
PNEUMATIC COMPONENTS

DAS
Certification
Approval
ISO 14001DAS
Certification
Approval
ISO 9001**ONE-TOUCH FITTINGS****CHECK VALVES**

GPC Male Straight	GPCF Female Straight	GPG Reducer	GPGJ Plug-In Reducer	GPL(L) Male Elbow	GPLF Female Elbow	GPLL Extended Male Elbow	GPMM Bulkhead Union	GPOL Hex. Holed Banjo	GPST Male Run Tee	PP Plug	PCP Coupler Plug	GPCVU Union Straight	GPCVC Straight
-----------------------------	--------------------------------	-----------------------	--------------------------------	-----------------------------	-----------------------------	------------------------------------	-------------------------------	---------------------------------	-----------------------------	-------------------	----------------------------	--------------------------------	--------------------------

ONE-TOUCH FITTINGS**HAND VALVES**

GPT Male Branch Tee	GPUC Union Straight	GPUG Different Dia of Union Tee	GPUL Union Elbow	GPUR Union Tee	GPW Reducer Y	GPWT Male Y	GPXG Reducer Double Y Union	GPY Union Y	GPZA Union Cross	GHVFF Union Straight	GHVSS Nipple
-------------------------------	-------------------------------	---	----------------------------	--------------------------	-------------------------	-----------------------	---------------------------------------	-----------------------	----------------------------	--------------------------------	------------------------

COMPACT ONE-TOUCH FITTINGS

PC-C Male Straight	PL-C Male Elbow	PT-C Male Branch Tee	PY-C Union Y	PZA-C Union Cross	PUC-C Union Straight	PUL-C Union Elbow	PUT-C Union Tee
------------------------------	---------------------------	--------------------------------	------------------------	-----------------------------	--------------------------------	-----------------------------	---------------------------

APEX SPEED CONTROLLERS

GNSE Elbow	GNSF Union Straight	NSE-C Mini Elbow	Metal Body Elbow
----------------------	-------------------------------	----------------------------	----------------------------

ROTARY JOINTS

NRC Straight	NRL Union Elbow	NHRC Straight	NHRL Elbow
------------------------	---------------------------	-------------------------	----------------------

500rpm(ø4)-250rpm(ø12) 1500rpm(ø4)-1000rpm(ø12)

BALL VALVES

GBC Straight	GBL Elbow	GBM Bulkhead Union	GBUC Union
------------------------	---------------------	------------------------------	----------------------

TWO-TOUCH FITTINGS

TC Straight	TL Elbow	TUT Union Tee	THL Universal Elbow
-----------------------	--------------------	-------------------------	-------------------------------

NYLON TUBINGS**POLYURETHANE TUBINGS****Specification**

Fluid	AIR (No other gases or liquids)	
Working Pressure Range	0~284PSI	0~20Kgf/cm ² (0~1960kPa)
Negative Pressure	-29.5 in Hg	-750mmHg(10Torr)
Temperature Range	32~176°F	0~80°C
Applicable Tube Material	Polyurethane and Nylon	

STAIR

PAINT SPRAY GUNS & AIR BRUSH



■ S-2C
Compact & Lightweight
Ideal for car refinishing
Suction Spray Gun
(Nozzle size: 1.4 - 3.0)



■ S-106 Series
Gravity Spray Gun
(Nozzle size: 1.4, 1.7, 2.0, 0.8)



■ SV 106 & SV-770
HVLP Professional
Suction Spray Gun
(Nozzle size: 1.3, 1.5, 1.8)



■ S-710 Series
General-purpose
Suction Spray Gun
(Nozzle size: 1.3, 1.5, 1.8)



■ S-770 Series
Professional
Suction Spray Gun
(Nozzle size: 1.5, 1.7, 2.0, 2.5)



■ SAP Series Air Brush
with Fluid Adjustment



■ S-710AA Series Automatic Spray Gun
(Nozzle size: 0.8, 1.0, 1.3, 1.5, 1.8, 2.0)




■ 10 liters & 2 liters Paint Tanks



Screwdriver Bit + Sockets



UHT 株式会社 Micro Die Grinder

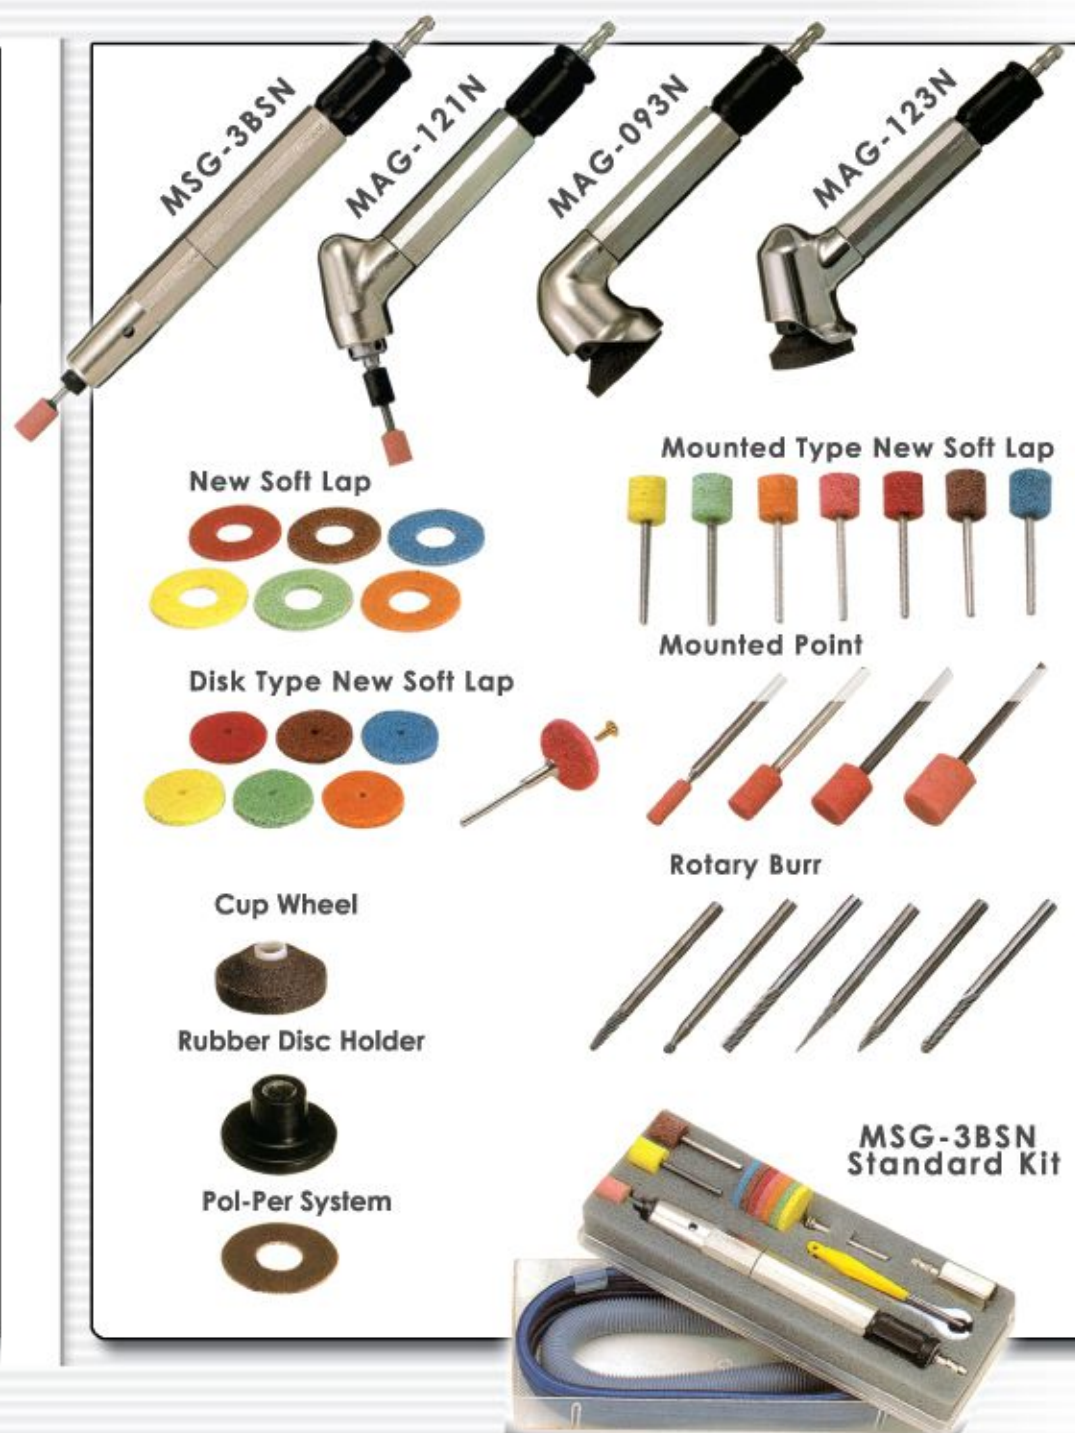

NEW RAPID

Air Screwdrivers



FASTENING TOOLS

- Air Shut Off (Torque Control)
- Cushion Clutch
- Impact Hammer

Specifications:

Torque Range : 0.05-22Nm
: 0.5 - 220kgf.cm
Screw Size : Up to 8mm




TIGON

SPRING BALANCER




TOOL MATE

SPRING BALANCER

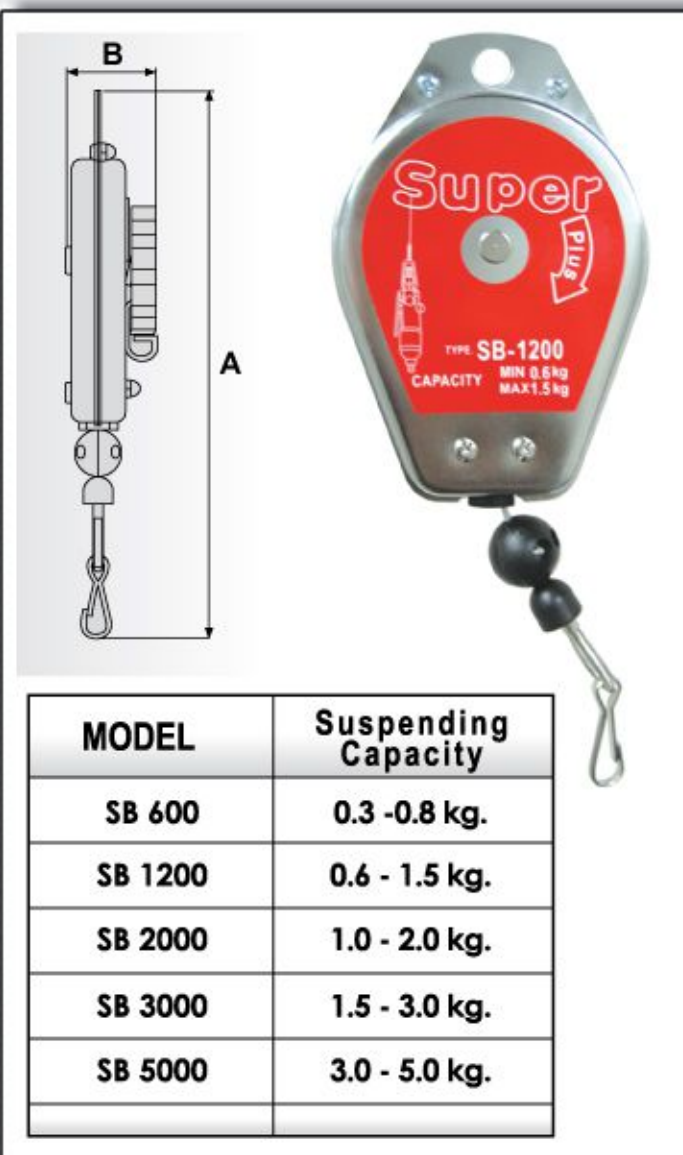

NIPPEI

HANDY AIR REEL

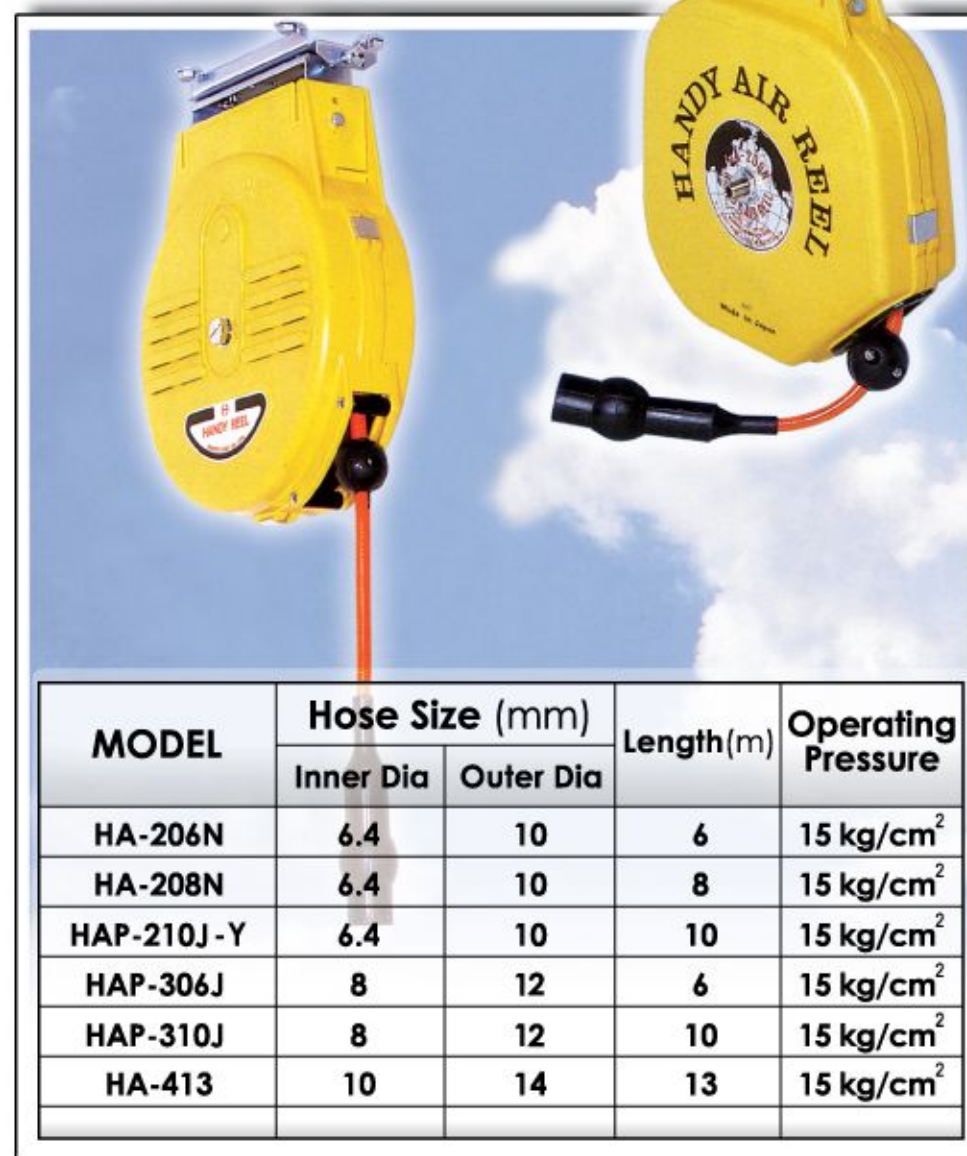

LINE REEL

AIR HOSE BALANCER

The "LINE REEL" air hose balancer, without any hampering chain or rope to balance the tool, contributes to keeping the work bench and work area uncluttered for safer operation, higher productivity, less operator fatigue and longer tool life. Suspending capacity can be adjusted externally.

AIR HOSE BALANCER

HR-09

SPECIFICATIONS :

MAXIMUM WEIGHT TO SUPPORT	1.5kg (3.3lb)
WORKING AIR PRESSURE	10kg/cm ² (140PSI)
ROLLED LENGTH IN THE REEL	1200 m/m
WEIGHT	850g (1.87lb)





Flexmind

RESIBON
 NIPPON RESIBON CORPORATION


- Depressed Center Grinding Wheels
- Cut - off Wheels
- Flexible Grinding Wheels



No.1 manufacturer of resin-bonded abrasive products in Japan.


**IMPACT SOCKETS
& ACCESSORIES**


Made Of Chrome Molybdenum Alloy Steel

Kosha-An[®]

**HAND SOCKET
&
ACCESSORIES**



NILE Air Tools

Air Fil-Saw



Air Plate Shear



Air Multi-Purpose Scissor



Air Wire Twister




Air Nipper



Square Air Cutter



STANDARD BLADES FOR AIR CUTTERS

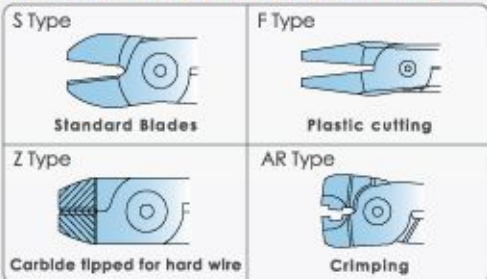

Plastic Gate Cutter



Hand Tools



Miniature Nipper



Plastic Cutting Nipper



Palm Grip Plier



End Cutting Nipper



Electronic Nipper



Heavy-duty Plastic Nipper



Heat Nipper



Transformer for heat nipper



ニュータイプ KURITA Air Dusters

Engine Cleaner



TH35



AG25 air curtain



AG45



AG35 retractable pipe



CH500

AG50 adjustable nozzle



AG45L lever type



AG50L adjustable nozzle & lever type



SG500




GT50 top connection (GT45, GT45L, GT50, GT50L)



SP100 for water / coolant



Extension pipes for AG45, AG50, GT45, GT50 (150, 200, 300, 500mm)



HIGH QUALITY TOGGLE CLAMP



Vertical Handle



Heavy Duty Weldable



Latch Type



Air Power Toggle Clamp



Air Units



Pilot & Mechanical Valves



Solenoid Valves



2 Way Solenoid Valves



Standard Cylinders



Compact Cylinders



Mini Cylinders



Stopper Cylinders



Grippers Cylinders



Guide Cylinders



Rodless Cylinders



Hydraulic Cylinders



Rotary & Clamp Cylinders



PLC



Other Auxiliary Equipment



實利達有限公司
SRITA SENDIRIAN BERHAD
 Reg. No. 49662-V

HEAD OFFICE 169, Jalan 27 Kaw. 16, Sg. Rasa, 41300 Klang, Selangor, Malaysia.
 Tel : 03-3341 3634 Fax : 03-3344 2070 E-mail : sritahq@srta.com Website : www.srita.com

PENANG OFFICE 5, Jalan Limbungan Indah, Taman Limbungan Indah, 12100 Butterworth, Pulau Penang.
 Tel : 04-333 3634 Fax : 04-331 3634 E-mail : salespg@srta.com

JOHOR OFFICE 112, Jalan Ros Merah 2/16, 81100 Johor Jaya, Johor.
 Tel : 07-357 9566 Fax : 07-358 4641 E-mail : salesjb@srta.com

MELAKA OFFICE 41, Jalan MP3, Taman Merdeka Permai, Batu Berendam, 75350 Melaka.
 Tel : 06-336 3634 Fax : 06-336 3355 E-mail : salesmk@srta.com